

FRAMOS SUPPORTS UTILIZATION OF SONY'S LATEST SWIR SENSOR TECHNOLOGY

Short Wavelength Infra-Red (SWIR), refers to a type of infrared light generally in the range of 0.9 –2.5 μm. SWIR imaging requires specific optical and electronic components transmit and detect these wavelengths. There are numerous advantages of combining SWIR imaging with visible light captures, specifically for surveillance, quality control, and - other applications.

COMMON SWIR APPLICATIONS



Quality assessment and sorting of products



Material contamination detection



Semiconductor inspection



Temperature estimation



Remote observation

ranges in captured images. The IMX990 and IMX991 sensors utilize the industry's smallest 5μm pixel size of any InGaAs based sensor and leverage Sony's original SenSWIR™ technology. They are SXGA 1/2-type and VGA 1/4-type images that are being made available by Sony's partner and vision expert, FRAMOS.

EXTENDING THE VISIBLE SPECTRUM

A single camera equipped with the IMX990 or IMX991 sensor can now cover both visible and the SWIR spectrum in a single image, which previously required separate cameras.


This results in:

- Lower system costs
- Less intensive image processing and accelerated inspection times
- Significant Increase of the scope of inspections

FRAMOS's industry and product experts are available to support customers with the integration of image sensors into their applications and projects. In addition, FRAMOS provides a broad range of support services for development, customization, and sensor logistics.

NEW IMX990 AND IMX991 SENSORS

Sony Semiconductor Solutions has launched two new image sensors that includes both the visible and SWIR

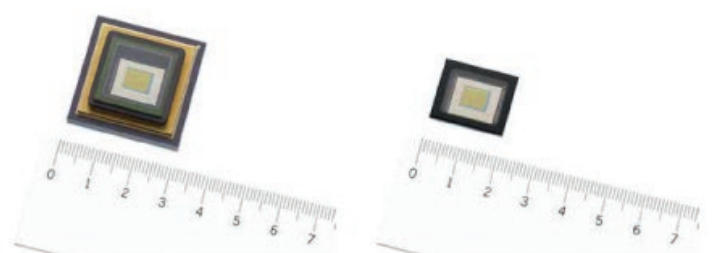

Ceramic PGA package with integrated thermoelectric cooling

Ceramic LGA package

FRAMOS SUPPORTS UTILIZATION OF SONY'S LATEST SWIR SENSOR TECHNOLOGY



CAPTURING WAVELENGTHS UP TO 1.7 μm

The spectral response of the new IMX990/IMX991 sensors is between 0.4 – 1.7 μm allowing them to detect and see into the SWIR spectrum while not compromising sensitivity within the visible spectrum.

The IMX990 1.34 MP sensor has a 1296 x 1032 active pixel array that can stream at 130 fps @ 8 bits, 120 fps @ 10 bits and 70 fps @ 12 bits. The IMX991 0.34 MP sensor, with its 656 x 520 active pixel array, streams at 250 fps @ 8 bits, 240 fps @ 10 bits and 130 fps @ 12 bits.

The Sony SenSWIR™ technology utilizes a copper-to-copper connection enabling a finer pixel pitch and smaller pixels. As a result, they can be incorporated into smaller, high-resolution cameras needed for more precise inspection systems.

The smaller pixel size of these images combined with Sony's sensor stacking technology enable a very compact design for their packages, thereby reducing the costs for similarly designed SWIR based cameras.

MODEL	Drive mode	Recommended recording pixels	ADC [bit]	Frame rate (max.) [fps]
IMX990	All-pixel readout	1280(H)×1024(V)	8	130
			10	120
			12	70
IMX991	All-pixel readout	640(H)×512(V)	8	250
			10	240
			12	130

Sibel Yorulmaz-Cokugur, FRAMOS sensor expert, states: "Sony's InGaAs based sensors are unique in the marketplace. Their small pixel size and stacked layer design creates very compact SWIR-based camera designs. Markets that can benefit from these sensors include those who target Machine Vision for inspection, selection, sorting or hyperspectral/multispectral cameras."

FEATURES

■ Industry's smallest pixel, at 5 μm

The combination of smaller pixel sizes that can see both visible and SWIR wavelengths in one image promise to expand SWIR sensing applications. These sensors higher resolutions offer more precision in inspections, while the smaller cameras that can be built with these sensors afford greater freedom in installations.

■ Broad spectrum (0.4–1.7 μm) from a single sensor

Inspections that once required multiple cameras to capture both visible and SWIR wavelengths can now be performed within a single image. This capability expands both the type of objects that can be inspected and the types of inspection that can be done. Overall system costs can be reduced by using only one camera, increasing image processing and inspection throughput.

■ Pure digital output

Unlike traditional SWIR sensors with their analog data outputs, these sensors feature only CMOS logic, digital outputs making them simpler to design into new cameras. In some cases, they can leverage existing CMOS sensor layouts and designs to speed up their development times into new products. No need to tune and calibrate analog components with each camera build.



Under visible light



Under SWIR imaging conditions

FRAMOS SUPPORTS UTILIZATION OF SONY'S LATEST SWIR SENSOR TECHNOLOGY




THE SECRET BEHIND SONY'S SENSWIR™ TECHNOLOGY


The back side illuminated (BSI) stacked structure has a thin layer of structural InP that covers the InGaAs pixels. Typically, a thick layer is applied to the surface which absorbs all but the longer wavelengths of light. This ensures that the sensor can provide high quantum efficiencies across all the supported wavelengths, from the visible through to the SWIR ranges, specifically within the .4 μm to 1.7 μm wavelengths.

Sony's pixel design and process technology, for thin InP layers, reduces the impact on the incident light improving transmission of visible wavelengths that can then be detected in the InGaAs pixel layer (along with SWIR photons).

The pixel wells are connected to the readout circuitry through Cu-Cu connections that help deliver high quality images in a compact design. One additional feature provided by the stacked design is real-time optical black (OPB) dark level information which eliminates the need for external dark current correction (DCC), simplifying camera designs.

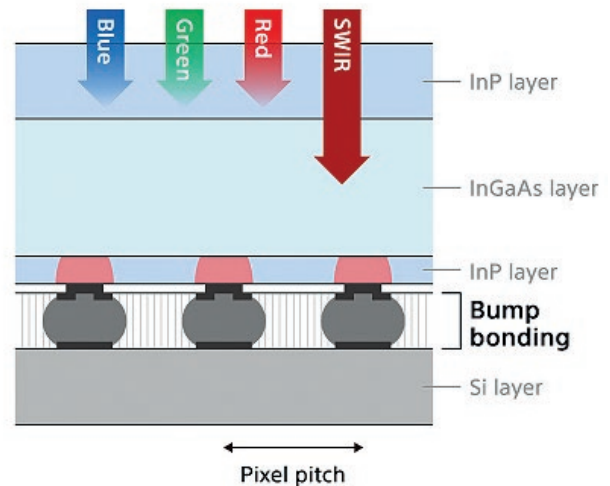

Bump bonding

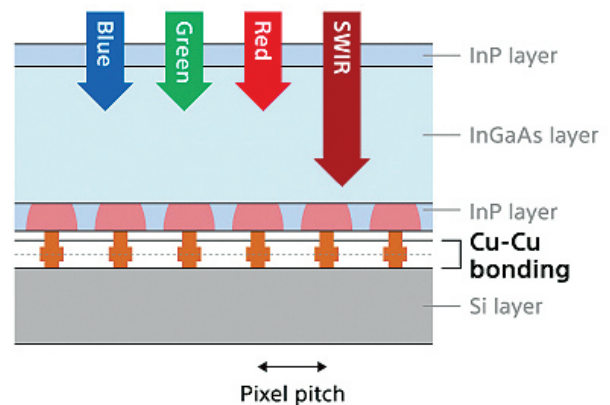

Cu-Cu bonding



HQ FRAMOS GMBH

Mehlbeerstr. 2
82024 Taufkirchen
Germany
Tel. +49 89 710 667-0

FRAMOS TECH. INC.

2733 Lancaster Road
Ottawa, Ontario
Canada
Tel. +1 613-208-1082

FRAMOS Italia Srl.

Centro Direzionale
2086 Agrate Brianza
Italy
Tel. +39 039 689 9635

FRAMOS TECH. LTD.

Lyon Way Frimley Rd
Camberley, Surrey
Great Britain
Tel. +44 1276 4041-40

FRAMOS D.O.O.

Dobriše Cesarića 5
40000 Čakovec
Croatia
Tel. +385 40 493 805

All product names, logos, and brands are property of their respective owners. Images or pictures copyright here: <https://www.frames.com/de/impressum>